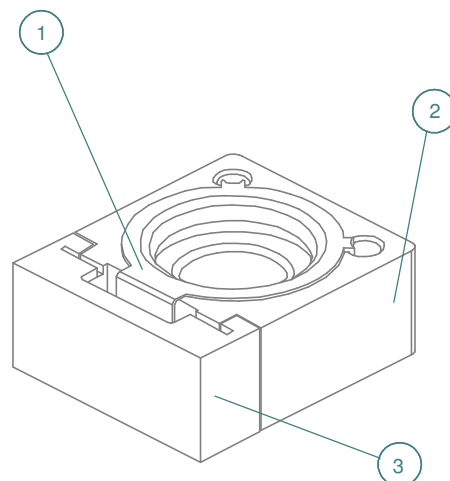
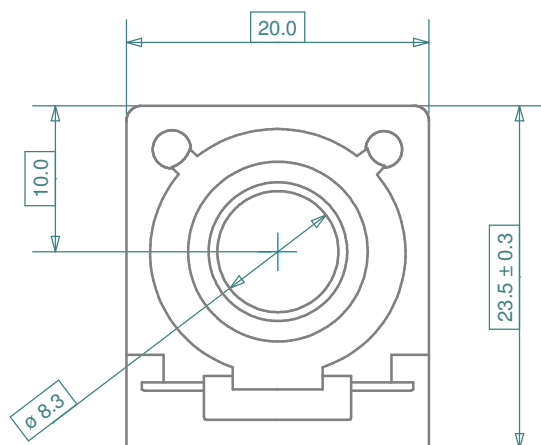


Number	Description
1	Fuse element
2	Ceramic body
3	Transparent cover

Fusing time ISO 8820-6 [s]		
Load [%]	Minimum [s]	Maximum [s]
110 %	360,000	-
135 %	5	1,800
150 %	1	600
200 %	0.2	60
350 %	0.03	1
600 %	0.01	0.2

Rating	Volt	iMaXX Reference
[A]	[V]	
50	58	CF050
75	58	CF075
100	58	CF100
125	58	CF125
150	58	CF150
175	58	CF175
200	58	CF200
250	58	CF250
300	58	CF300

Note: Amperage rating and production date (WWYY) stamped on metal part

E	Revisions			Date	Appr.			
	Date	Type	Drawn	06/12	AdH			
			Checked	06/12	AdH			
			Standards					
			Approved	06/12	AdH			
F			Scale	not to scale		Title	CF series, cubeOTO fuse	
			Projection	Tolerance		Drawing type	schematic	
				± 0.2 mm unless otherwise noted		Drawing number	CF drawing 1	
						Sheet	1 of 1	
						Layers / Sheet	0 1 2 6 9 11 Sheet 01	
1			2		3		4	